


LAMP II

ACCOMPLISH A ONE-PASS MAINLINE INSPECTION
WITH A SIMULTANEOUS ADJACENT LATERAL INSPECTION!

Lateral & Mainline Probe II

*NEW Fiberglass
Cable Option*

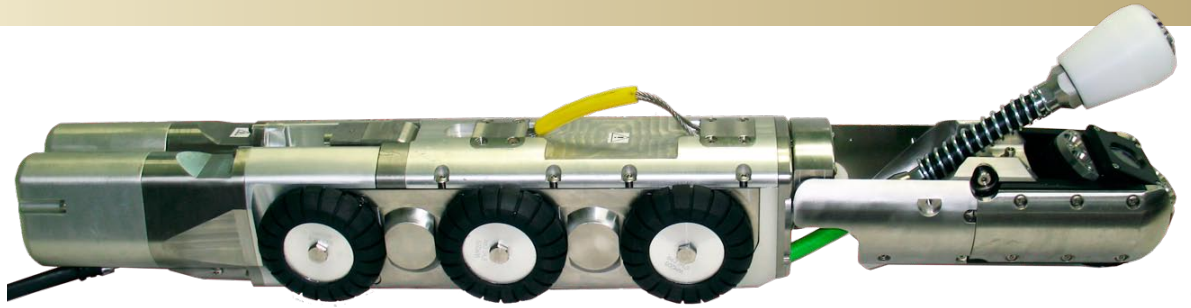

*Stainless Steel
Cable Option*



"The Standard of the Industry"



- ↪ Inspect Mainlines and Adjacent Lateral Services with One Inspection Run
- ↪ Lightweight / Compact Wheeled Unit! Pulls 1000 ft.
- ↪ Single Point Removal of Wheels
- ↪ Easily Fits Into a 6" Line

Other features and Benefits:

- Inspect 6"-24" mainlines and 3"-8" lateral services
- Front-mounted pan and tilt / zoom camera (40:1 Optical / Digital Zoom):
 - Completes mainline inspection and monitors lateral camera
 - Articulates to facilitate invert entry
 - Automatic centering
- Lateral camera Includes built-in auto upright feature keeps the image stabilized at all times:
 - Can be quickly removed to use the unit as a mainline transporter with the front-mounted pan and tilt / zoom camera
- Built-in Sonde in the lateral camera for locating
- Maximum clearance in a 6" diameter line
- Supplied with 4 sets of Wheels for 6"-24" lines
- Optional wheel sets are available - steel based for high traction
- Traverses 45 and 90 degree bends in lateral services
- Quick removal and insertion of wheel sets
- NEW Fiberglass Cable Option: up to 120 ft. push cable
- Stainless Steel Cable Option: up to 100 ft. push cable
- Rear tip-up connector
- Compact length



*Maximum clearance in
a 6" mainline!*